


Product container with fitted lid, complete with pneumatic stirrer, inspection door and level reading

P-ST40-03x



P-ST40-01x

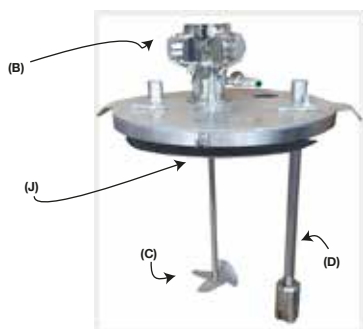

Features:

- Complete AISI 316 stainless steel execution
- Capacity 40 litres (max)
- Anchorage supports (A)
- Lid - teflon soft
- Pneumatic agitator (B)
- Triple, quadruple or coverless (C)
- Scarico inferiore - G 1" (F)
- Suction strainer with filter (D)

Lid:

- Clamping clamps (E)
- Opening inspection hatch (F)
- Standard connections: 2 x G 1/4", 1 x G 1/2"
- Non-contact fluid level sensor (G)
- Perforated protection grid under the lid (J)

General dimensions:

- H = 500 mm - DN 350 (external ø355.6 mm)

Internal basket (optional):

- Standard - 30 litres (H)
- Reduced volume - 10 litres (I)

Complementary components:

- Mobile stand with integrated drip tray
- Pneumatic motor pump
- Level setting control unit with alarms (G)

Request product data sheet
subscribe to: sales@airmotion.it

Product container with fitted lid, complete with pneumatic stirrer, inspection door and level reading



- ← Typical tank applications with centralised product extraction
- ← On-site equipment for automated paint island

- ↓ Complete equipment with process control on mobile stand with drip tank with level control unit with alarms



← Level cover with stainless steel colour viewer protection



Request product data sheet
subscribe to: sales@airmation.it